


## 5 and 10-Ton Hydraulic Service Jacks

- A built-in safety overload prevents using the jack beyond its rated capacity.
- A convenient foot pedal speeds the lifting operation, handle lock and release control are located on top of the handle. Handle can be locked into any position from vertical to horizontal.
- Both models have spring-loaded 40" handle.

**No. 1505B** – 5-ton capacity with a lifting range of 6" to 22", reach 47", frame height 7-3/4", and floor space of 56" x 14-3/4".

**No. 1510B** – 10-ton capacity with a lifting range of 5-3/4" to 22", reach 51", frame height 9-3/4", and floor space of 60" x 18".

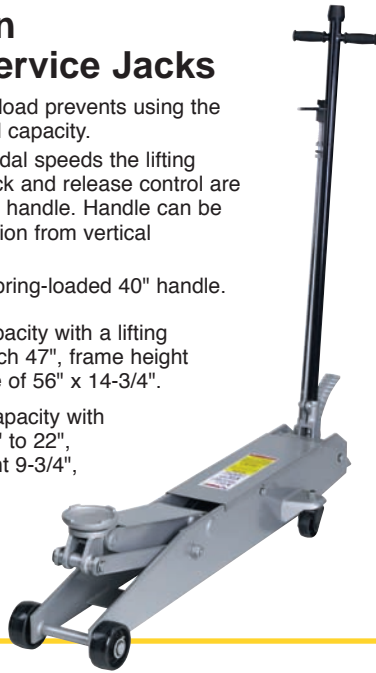

## 2,000 lb. Capacity Low-Lift Transmission Jack

- Adapter plate for Eaton® Fuller® Road Ranger® transmissions.
- Covered by the OTC Stinger two-year warranty.
- Height range: 6-1/2" to 35".
- Safety overload prevents use beyond its rated capacity.

**No. 1522A** – 2,000 lb. Capacity Low-Lift Transmission Jack.




## 5-Ton and 10-Ton Capacity Air/Hydraulic Service Jacks

- Bring the versatility of air-assist operation to your shop's lifting tasks. The 10-ton model can also be operated manually, when shop air is not available.
- Huge front wheels mounted in bearings provide trouble-free service life. Rugged steel frame members.
- Rear swivel casters make spotting the jack easy. Spring-loaded handle may be locked in three positions, from horizontal to vertical.

**No. 1507A** – 5-ton Air/Hydraulic Service Jack.


**No. 1511A** – 10-ton Air/Hydraulic Service Jack.

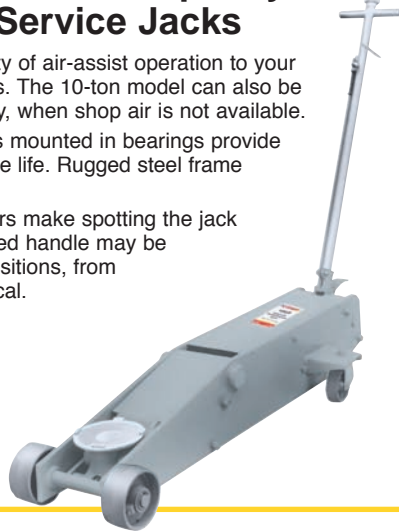

## Truck Dual Wheel Dolly

- This 1,500 capacity dolly will remove, transport, and replace dual wheel and tire assemblies without strain or struggle. Swivel casters, 3-1/2" front and 3" rear, provide easy maneuverability.
- Floor space is 43" by 42".
- No. 1769A hydraulic jack provides over 6-1/2" of lift and tilts wheel assembly 7° to prevent damage to wheel seal.
- Includes a 6' support chain to hold load in place.

**No. 1769A** – Dual wheel dolly.

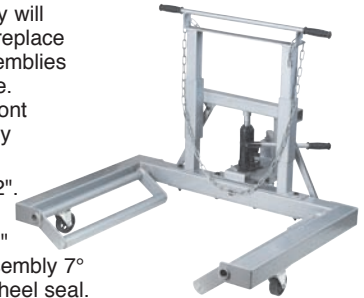

## 22-Ton Capacity Under-Axle Jack

- Long 51" T-handle for easy positioning under vehicles with long overhangs.
- Jack has large rubber-tired wheels.
- Lifting range: 8-1/4" min. and a max. height of 17" with adapter. Includes four adapters.
- Cylinder stroke is 4-1/2".
- PSI range is 90-145.


**No. 1788A** – Under-Axle Jack.



## 20-Ton Hydraulic Service Jack

- Built of the highest quality heavy-gauge steel, this jack features precision hydraulics for a lifetime of hard work.
- Low-profile stance and extended height add to versatility. This jack will lift everything from cars, to trucks, to heavy-duty commercial vehicles. Huge metal wheels and swivel casters roll effortlessly on internal bearings.
- Either the foot pedal or jack handle may be used for pumping action. Counterbalanced, spring-assisted handle has a three-position lock.
- Lifting range is 7-1/2" to 24" with a frame height of 10-1/4" and overall reach of 96". Handle length is 42" and saddle diameter is 7-1/2".

**No. 1512** – 20-ton Service Jack.

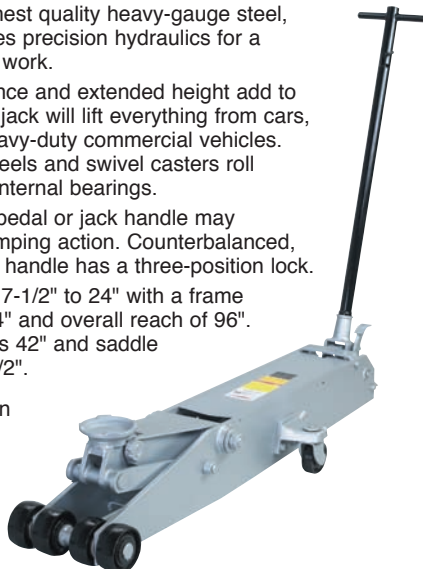

## Stinger Easy Roller™

- Provides simple and efficient method of moving a disabled vehicle around a shop environment.
- Fits tread widths up to 12"
- 4 heavy-duty phenolic casters
- 1,500 lbs. capacity per unit.
- Hydraulic lift mechanism with locking pin.

**No. 1580** – 1,500 lb. Stinger Easy Roller™ (sold individually).

**No. 1580**  
(sold individually)

## Easy Roller™ Stand

This stand provides users of the 1580 with convenient storage rack for up to four Stinger 1580 Easy Roller Car Dollies.

- Capacity: 4 Easy Rollers @ 44 lbs. each approx. 200 lbs. (1580's sold separately)
- Casters for easy mobility in shops and non-metal wheels to protect shop floor.

**No. 1581** – Stinger Easy Roller™ Stand.

